

Brough
Superior

since 1919



VINTAGE MOTORCYCLE OIL SAE 50

BROUGH SUPERIOR ELF Vintage Motorcycle Oil SAE 50 is a semi-detergent monograde lubricant for 4-stroke motorcycles formulated from selected mineral bases. BROUGH SUPERIOR ELF Vintage Motorcycle Oil SAE 50 is recommended for vintage and classic motorcycles requiring a SAE 50 grade and suitable for total loss lubrication systems used in early motorcycles.

Grade: SAE 50

API: SF

Pack: 5L



CHARACTERISTICS*

| Test | Unit | Result |
|------------------------------|--------------------|--------|
| Density at 15°C | kg/m ³ | 890 |
| Kinematic viscosity at 100°C | mm ² /s | 18.2 |
| Viscosity index | - | 99 |
| OC Flash Point | °C | >220 |
| Pour Point | °C | -9 |
| T.B.N | mgKOH/g | 11 |
| Sulphated Ash | % m/m | 1.54 |

*The characteristics given above are obtained with a standard tolerance during production and may not be considered specifications.



RECOMMENDATIONS FOR USE

Before using the product, the vehicle's user guide should be checked. Oil changes should be carried out in accordance with the manufacturer's recommendations.

The product should not be stored at temperatures over 60°C. It should be kept away from sunlight, intense cold and extreme temperature fluctuations.

If possible, the packaging should not be exposed to the elements. Otherwise, the drums should be laid horizontally in order to avoid any contamination from water and to prevent the product's label from rubbing off.

HEALTH, SAFETY & THE ENVIRONMENT

Based on the toxicological information available, this product should not cause any adverse health effects, provided it is used for its intended purpose and in accordance with the recommendations laid out in the Safety Data Sheet. This can be obtained on request from your local reseller and is available for consultation at www.quickfds.com.

This product should not be used for any purposes other than the ones for which it is intended.


When disposing of the product after use, please protect the environment and comply with local regulations.

Last update of this datasheet: 11/2017

Some variations can be expected under normal production conditions, but these should not affect the product's expected performance irrespective of the site.

The information contained in this document is subject to change without notice. Our products can be viewed on our website at www.lubrifiants.total.fr.

TOTAL Lubrifiants
Immeuble Le Spazio
562, avenue du Parc de l'île
92029 Nanterre Cedex
France

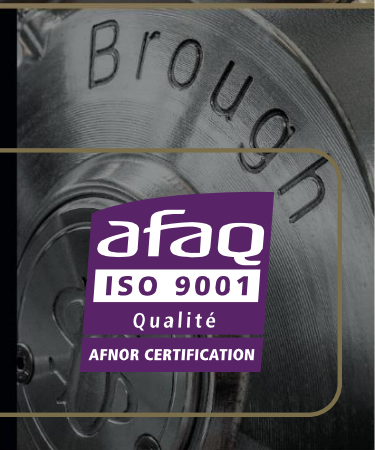

afaq
ISO 9001
Qualité
AFNOR CERTIFICATION